





Model : ADF-595
ADF-695
DTS-795

Technical Specifications :

Body	Brass Forged / CF8
Valve	Two-position Two-way Direct acting Solenoid Valve
Connection Port	1/4", 3/8", 1/2" (Female)
Coil	All standard voltage available
Pressure	Upto 10 kg/cm ² , 21 kg/cm ² , 60kg/cm ²
Temperature	90 °C
Voltage	24-240V, DC/AC 50/60
Time ON	form 0.5 to 10 Sec.
Time OFF	form 0.5 to 45 Min.
Manualoverride	Test
Mounting	Any Place

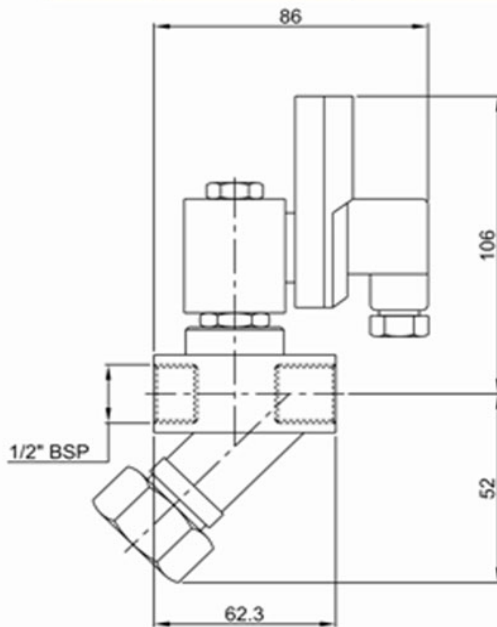

ADF 695-2 AND DTS - 795

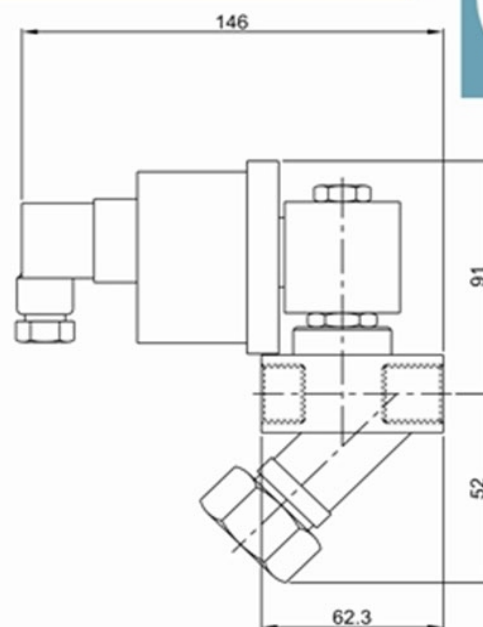

ADF 595

Timer Functions :

Upon application of power to the input terminals, the ON cycle is initiated and the solenoid is energised. At the end of preset ON time, the Solenoid is de - energised and OFF cycle begins, Cycling continues unit power is removed from the input terminals.

Instructions for operation of Electronic Timer:

To Set "ON" Sec. Turn "ON" button in Clockwise (to increase "ON" Seconds) / Anticlockwise (to reduce "ON" Seconds).

To Set "OFF" Min. Turn "OFF" button in Clockwise (to increase "OFF" Min.) Anticlockwise (to reduce "OFF" Min).