


# THB F.R.L. COMBINATIONS




**FRL 202**

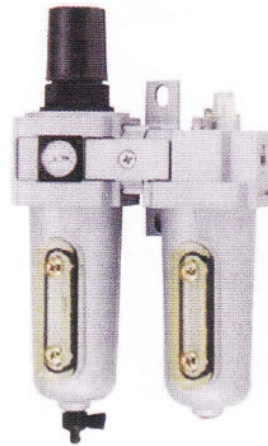


**FRL 706**




**C 908A**

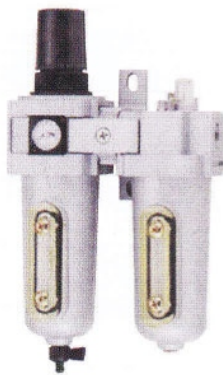

**FRL 704**



**FR 704**



**L 704**

## SPECIFICATION

DESCRIPTION \ TYPE	FRL202	FRL704	FRL706	C908A
PORT SIZE (PT, NPT)	1/4"	1/2"	3/4"	1"
FILTER ELEMENT	5μ	5μ	5μ	5μ
MAX INPUT PRESSURE (PSI)	150	250	250	250
MAX OUTPUT PRESSURE (PSI)	7~14	225	225	225
MAX FLOW (L/MIN)	1100	4000	4000	5200
OPERATING TEMP RANGE	5°C~60°C	5°C~60°C	5°C~60°C	5°C~60°C
DRAIN CAPACITY	15ml	80ml	80ml	300ml
OIL CAPACITY	30ml	150ml	150ml	350ml
RECOMMENDABLE LUBRICANTS	ISO VG-32	ISO VG-32	ISO VG-32	ISO VG-32